

# Accessories and Fittings for the GREASOMATIC®96

## ADAPTORS



**GMA 1**  
¼BSP/F/P : 1/8 BSP/M/P



**GMA 2**  
¼BSP/F/P : 3/8 BSP/M/T



**GMA 8**  
¼BSP/F/P : ¼-28 UNF/M/T



**GMA 9**  
¼BSP/F/P : M10



**GMA 10**  
¼BSP/F/P : M6



**GMA 26**  
¼BSP/F/P : M8

## GENERAL FITTINGS



**GMA 3**  
UNION ¼BSP/F/P : ¼BSP/F/P



**GMA 4**  
UNION ¼BSP/M/P : ¼BSP/M/P



**GMA 5**  
T - PIECE : ¼BSP/F/P  
(all three)



**GMA 6**  
BEND 90°  
¼BSP/F/P : ¼BSP/M/T



**GMA 7**  
BEND 45°  
¼BSP/F/P : ¼BSP/M/T

## BALL VALVES




**GMA 24**  
¼BSP/M/P : ¼BSP/F/P



**GMA 25**  
¼BSP/F/P : ¼BSP/F/P

## RIGID EXTENSION TUBES

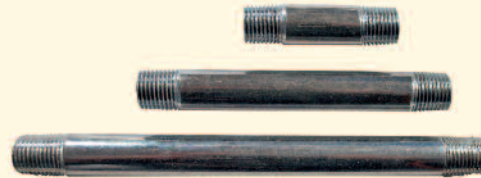

**GMA 11** 50 mm ¼BSP/M/T:¼BSP/M/T

**GMA 12** 100 mm ¼BSP/M/T:¼BSP/M/T

**GMA 13** 150 mm ¼BSP/M/T:¼BSP/M/T

## FLEXIBLE EXTENSION TUBING



**GMA 14**  
NYLON  
EXTENSION TUBING  
Flexible - for use only up to 80°C  
8 mm od / 6 mm id



**GMA 15**  
COPPER  
EXTENSION TUBING  
Pliable - usable at over 80°C  
8 mm od / 6 mm id

## FLEXIBLE TUBING COUPLINGS

for use with either nylon or copper tubing



**GMA 16**  
¼BSP/M/T : 8 mm od



**GMA 17**  
¼BSP/F/P : 8 mm od



**GMA 18**  
90° bend  
¼BSP/F/P : 8 mm od



**GMA 19**  
45° bend  
¼BSP/M/T : 8 mm od

## BRUSH FITMENTS



**GMA 22**  
¼BSP/F/P bristles 40 mm long  
20 mm Ø - overall length 70 mm



**GMA 23**  
¼BSP/F/P bristles 20 mm long  
Overall width 32 mm, length 100mm, depth 48 mm

## MOUNTING BRACKETS

**GMA 20**  
Plastic Click-fit  
Bracket



**GMA 27**  
Stainless steel  
Bracket




## DISCHARGE RATE THROTTLE & NON RETURN VALVE

**GMA 21**

¼BSP/F/P : ¼BSP/M/T

Opens one way only at light pressure of circa 0.3 bars or 4 psi.  
For use in preventing premature discharge of GREASOMATICs with oil-fillings  
and also for use with any GREASOMATIC®96 that is to discharge into a  
pressurised system.



## ABBREVIATIONS

¼BSP = ¼ British Standard Pipe  
thread (also = G¼ thread)

**F** = female thread      **M** = male thread  
**P** = parallel thread      **T** = taper thread